





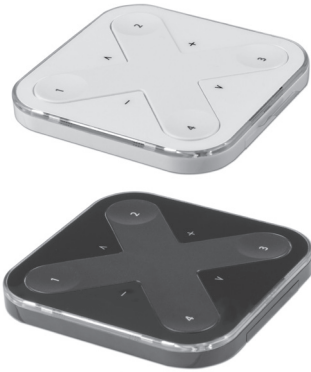




	Article Articolo		Code Codice
	<p><b>CASAMBI CBU-ASD-C-3100</b></p> <ul style="list-style-type: none"> <li>• Bluetooth 4.0 control unit</li> <li>• Rated Voltage: 220-240 Vac</li> <li>• Vout: 0-10 Vdc (0-10 V) 9-12 Vdc (DALI)</li> <li>• Digital output: Standalone DALI</li> <li>• Analog output: 0-10 V</li> </ul>	<p><b>CASAMBI CBU-ASD-C-3100</b></p> <ul style="list-style-type: none"> <li>• Unità di controllo Bluetooth 4.0</li> <li>• Tensione nominale: 220-240 Vac</li> <li>• Vout: 0-10 Vdc (0-10 V) 9-12 Vdc (DALI)</li> <li>• Uscita digitale: Standalone DALI</li> <li>• Uscita analogica: 0-10 V</li> </ul>	181220
	<p><b>CASAMBI CBU-ASR-C-4423</b></p> <ul style="list-style-type: none"> <li>• Bluetooth 4.0 2 Channels Control Unit</li> <li>• Rated Voltage: 12-24 Vdc, 30 mA</li> <li>• Two 0-10V Output Channels: max. 5 mA each</li> <li>• Ideal for Tunable White</li> <li>• Sensor input: max. 24 Vdc</li> </ul>	<p><b>CASAMBI CBU-ASR-C-4423</b></p> <ul style="list-style-type: none"> <li>• Unità di controllo Bluetooth 4.0 a 2 canali</li> <li>• Tensione nominale: 12-24 Vdc, 30 mA</li> <li>• Due canali di uscita 0-10 V: max. 5 mA ciascuno</li> <li>• Ideali per Tunable White</li> <li>• Ingresso sensore: max. 24 Vdc</li> </ul>	181223
	<p><b>CASAMBI CBU-PWM4-0-C-4027 (CE)</b></p> <ul style="list-style-type: none"> <li>• Bluetooth 4.0 4 Channels PWM Dimmer for constant voltage loads</li> <li>• Rated Voltage: 12-24 Vdc, max. 6 A</li> <li>• Output power: max. 144 W @ 24 Vdc; max. 72 W @ 12 Vdc</li> <li>• Four PWM Output Channels: max. 6 A</li> <li>• Ideal for RGBW and Tunable White</li> </ul>	<p><b>CASAMBI CBU-PWM4-0-C-4027 (CE)</b></p> <ul style="list-style-type: none"> <li>• Dimmer PWM 4 canali Bluetooth 4.0 per carichi in tensione costante</li> <li>• Tensione nominale: 12-24Vdc, max. 6 A</li> <li>• Potenza in uscita: max. 144 W @ 24 Vdc; max. 72 W @ 12 Vdc</li> <li>• 4 canali di uscita PWM: max. 6 A</li> <li>• Ideale per RGBW e Tunable White</li> </ul>	181221
	<p><b>CASAMBI CBU-PWM4-4-C-4027 (UL)</b></p> <ul style="list-style-type: none"> <li>• Bluetooth 4.0 4 Channels PWM Dimmer for constant voltage loads</li> <li>• Rated Voltage: 12-24 Vdc, max. 4 A</li> <li>• Output power: max. 96 W @ 24 Vdc; max. 48 W @ 12 Vdc</li> <li>• Four PWM Output Channels: max. 4 A</li> <li>• Ideal for RGBW and Tunable White</li> </ul>	<p><b>CASAMBI CBU-PWM4-4-C-4027 (UL)</b></p> <ul style="list-style-type: none"> <li>• Dimmer PWM 4 canali Bluetooth 4.0 per carichi in tensione costante</li> <li>• Tensione nominale: 12-24Vdc, max. 4 A</li> <li>• Potenza in uscita: max. 96 W @ 24 Vdc; max. 48 W @ 12 Vdc</li> <li>• 4 canali di uscita PWM: max. 4 A</li> <li>• Ideale per RGBW e Tunable White</li> </ul>	181222
	<p><b>CASAMBI CBU-TED-C-526</b></p> <ul style="list-style-type: none"> <li>• Bluetooth Trailing-Edge Dimmer</li> <li>• Rated Voltage: 85-240 Vac, max. 0,65 A</li> <li>• Output power: max. 150 VA @ 230 Vac; max. 75 VA @ 120 Vac</li> <li>• Min. Load: 1 W</li> </ul>	<p><b>CASAMBI CBU-TED-C-526</b></p> <ul style="list-style-type: none"> <li>• Dimmer Bluetooth a taglio di fase</li> <li>• Tensione nominale: 85-240Vac, max. 0,65 A</li> <li>• Potenza in uscita: max. 150 VA @ 230 Vac; max. 75 VA @ 120 Vac</li> <li>• Carico minimo: 1 W</li> </ul>	181224
	<p><b>CASAMBI CBU-DCS-C-8079</b></p> <ul style="list-style-type: none"> <li>• Bluetooth 4.0 control unit</li> <li>• Rated voltage: 9,5-22,5 Vdc, 5 mA</li> <li>• Powered by a DALI bus</li> <li>• Combinable with presence/daylight DALI detectors</li> </ul>	<p><b>CASAMBI CBU-DCS-C-8079</b></p> <ul style="list-style-type: none"> <li>• Unità di controllo Bluetooth 4.0</li> <li>• Tensione nominale: 9,5-22,5 Vdc, 5 mA</li> <li>• Alimentato mediante bus DALI</li> <li>• Compatibile con rilevatori DALI di presenza/luminosità</li> </ul>	181225
	<p><b>CASAMBI XPRESS-W-C-239</b> <b>CASAMBI XPRESS-B-C-239</b></p> <ul style="list-style-type: none"> <li>• Wireless user interface</li> <li>• Rated Voltage: battery (CR2430)</li> <li>• Four target buttons</li> <li>• Single luminaire &amp; groups control</li> <li>• Scenes &amp; animations recall</li> <li>• Colour temperature change</li> <li>• Direct/Indirect lighting ratio change</li> <li>• Transmission range (free field): up to 50 m</li> <li>• Colour: white 181226 - black 181227</li> <li>• IP20</li> </ul>	<p><b>CASAMBI XPRESS-W-C-239</b> <b>CASAMBI XPRESS-B-C-239</b></p> <ul style="list-style-type: none"> <li>• Interfaccia utente wireless</li> <li>• Tensione nominale: batteria (CR2430)</li> <li>• 4 pulsanti</li> <li>• Controllo singola lampada o gruppi</li> <li>• Recall di scene e animazioni</li> <li>• Variazione temperatura colore</li> <li>• Variazione livello di illuminazione diretta/indiretta</li> <li>• Raggio di copertura: fino a 50 m (campo libero)</li> <li>• Colore: bianco 181226 - nero 181227</li> <li>• IP 20</li> </ul>	181226 White 181227 Black